

DuplineSafe Safety Input Module Type GS 7510 2101

CARLO GAVAZZI



- Bus-powered input module
- Single input for potential-free contacts
- Small dimension IP67 housing for de-central installation at the actual location of the switch
- Safety approved according to IEC/EN 61508-SIL3, IEC/EN 62061-SIL3 and ISO/EN 13849-1 PL e
- Approval authority: TÜV Rheinland Group
- Uses two Dupline® channels
- Operates on a standard Dupline® network
- It is possible to use DuplineSafe modules and standard Dupline® modules on the same bus
- Address coding with GS73800080
- Typically used for emergency stops or other NC safety contacts

Product Description

Bus-powered safety input module approved according to IEC/EN 61508-SIL3, IEC/EN 62061-SIL3 and ISO/EN 13849-1 PL e by TÜV. The module has a single input for potential-free contacts, and it uses two Dupline® channels for sending the safety signal. The small dimension IP67 housing makes it suitable for

de-central installation, e.g. inside a pull-cord switch. The module is always used in conjunction with the DuplineSafe Safety Relay GS 38300143230. The “safe state” signal is transmitted continuously to the Safety Relay as long as the input contacts are closed and the module self-check is OK.

Type Selection

| Supply | Ordering no. DuplineSafe Safety Input Module |
|-------------|---|
| By Dupline® | GS 7510 2101 |

Safety Specifications

| Standards | IEC/EN 62061-SIL3 ISO/EN13849-1 PL |
|--------------------|---------------------------------------|
| Approval authority | TÜV Rheinland Group |
| SFF | 96% |
| PFD (T1 = 1 year) | 5.0×10^{-6} |
| PFH | $5.9 \times 10^{-9}/h$ |

Supply Specifications

| Power Supply | Supplied by Dupline® |
|-----------------------------|----------------------|
| Reverse polarity protection | Yes |
| Current consumption | Typ. 1,0 mA |

Ordering Key

GS 7510 2101

| | |
|-------------------------|-------|
| DuplineSafe | _____ |
| Housing | _____ |
| Buspowered input module | _____ |

Input Specifications

| | |
|---|---------------|
| Inputs | 1 NC Contact |
| Open loop voltage | 2.5 V |
| Short-circuit current | 100 μ A |
| Contact resistance | < 1k Ω |
| Cable length | max. 1 m |
| Dielectric voltage | None |
| Inputs – Dupline® | |
| Response time 1 | |
| From input contact opens to safety relay releases | max 300 ms |
| Response time 2 | |
| From input contact closes to safety relay activates | max 600 ms |

General Specifications

| | |
|----------------------------------|-------------------------|
| Power ON delay | < 5s |
| Environment | |
| Degree of protection | IP 67 |
| Pollution degree | 3 (IEC 60664) |
| Operating temperature | -40°C to 70°C |
| Storage temperature | -40° C to 70°C |
| Humidity (non-condensing) | 20 - 80% |
| Mechanical resistance | |
| Shock | 15 G (11 ms) |
| Vibration | 2 G (6 to 55 Hz) |
| Housing | |
| Material | Valox PBT, Yellow |
| Dimensions | 57,5 x 36,0 x 16,4 mm |
| Termination | |
| Material | Cable |
| Length | PVC, Black |
| Dimension | 300 mm |
| | 6 x 0.5 mm ² |

Mode of Operation

The DuplineSafe Safety Input module GS75102101 is used to monitor the status of one potential-free contact in a safety device, e.g. an emergency stop palm button or pull cord switch. The status of the safety contact is continuously transmitted on the Dupline® bus using a dynamic signaling principle on two Dupline® channels. The Safety Input module is always used in conjunction with the DuplineSafe Safety Relay GS38300143230, which can monitor up to 63 Safety Input modules all connected to the same Dupline® bus. If one or more

GS75102101's fails to send the "safe state" signal the Safety Relay will release.

Addressing

For addressing of GS75102101, the DuplineSafe Configuration Unit GS73800080 is used. The GS75102101 must have 3 Dupline® channels assigned to it

- Synchronization channel (same for all safety transmitters)
- Safety Transmit channel 1
- Safety Transmit channel 2

Please refer to the user manual for the DuplineSafe Configuration Unit GS73800080 for detailed instructions on how to configure the Safety Transmitter GS75102101 with the desired addresses.

The synchronization channel is used by the Safety Relay to send out a synchronization signal to the Safety Input modules on the bus. Therefore, all the Safety Input modules and the Safety Relay must be coded for the same synchronization channel.

Safety Transmit channel 1 and Safety transmit channel 2 are used by the GS75102101 to transmit the status of the safety switch in a dynamic way, ensuring redundancy, diversity and continuous updating. Each GS75102101 must be coded for a unique channel pair not used by any other GS75102101.

Please refer to the data-sheet for the safety relay GS38300143230 for detailed instructions how to ensure correct addressing, installation and configuration of a DuplineSafe safety system.

Installation Rules

Due to fact that the DuplineSafe input module is a single channel device (one input), there are specific installation rules that have to be followed in order to achieve an installation complying with IEC/EN 61508-SIL3, IEC/EN 62061-SIL3 and ISO/EN 13849-1 PL e:

- A short circuit between the 2 wires in the cable between the terminals

of the input modules and the E-stop button must be excluded. This is possible, when the conditions, which are mentioned in EN ISO 13849-2 table D.4 (see below), are met.

- Short circuits between the adjacent terminals at the input of the input module and between the terminals at the E-Stop push-button must be excluded. This is possible, when the condi-

tions mentioned in EN ISO 13849-2 table D.6 (see below) are met.

- The E-Stop button must meet the requirements for direct opening according to EN 60947-5-1 Annex K. In this case it is ensured, that the contact in the E-Stop button opens, when the push-button is pressed (see table D.8 in EN ISO 13849-2 below).

These 3 conditions are

usually fulfilled, if the input module is placed very close to the E-Stop push-button and in a closed housing, which meets IP 54 rating or higher. The push-button and the cabling must not be stressed by external mechanical influences. The E-Stop push-button must have been approved according to EN 60947-5-1 for direct opening.

Table D.4 – Conductors/cables

| Fault considered | Fault exclusion | Remarks |
|--|---|---|
| Short-circuit between any two conductors | Short-circuit between conductors which are <ul style="list-style-type: none"> - Permanently connected (fixed) and protected against external damage, e.g. by cable ducting, armouring, or - separate multicore cables, or - within an electrical enclosure (see remark 1)), or - individually shielded with earth connection. | 1) Provided both the conductors and enclosed meet the appropriate requirements (see EN 60204-1 (IEC 60204-1)) |
| Short-circuit of any conductor to an exposed conductive part or to earth or to the protective bonding conductor. | Short-circuits between conductors which are within an electrical enclosure (see remark 1). | - |
| Open-circuit of any conductor | None | - |

Table D.6 – Terminal block

| Fault considered | Fault exclusion | Remarks |
|--|---|---|
| Short-circuit between adjacent terminals | Short-circuit between adjacent terminals in accordance with remarks 1) or 2). | 1)The terminals used are in accordance with a CENELEC or IEC standard and the requirement of EN 60204-1:1997 (IEC 60204-1:1997), 14.1.1 are satisfied. 2)The design by itself ensures that short-circuit is avoiding, e.g. by shapping shrink down plastic tubing over connection point. |
| Open-circuit of individual terminals | None | - |

D.5.3. Switches


Table D.8 – Electromechanical position switch, manually operated switch

(e.g. push-button, reset actuator. DIP switch, magnetically operated contacts, reed switch, pressure switch, temperature switch).

| Fault considered | Fault exclusion | Remarks |
|---|--|---|
| Contact will not close | None | - |
| Contact will not open | Contact in accordance with EN 60947-5-1:1997 (IEC 60947-5-1:1997), annex K are expected to open. | - |
| Short-circuit between adjacent contacts insulated from each other. | Short-circuit can be excluded for switches in accordance with EN 60947-5-1 (IEC 60947-5-1) (see remark 1)). | 1)Conductive parts which become loose should not be able to bridge the insulation between contacts. |
| Simultaneous short-circuit between three terminals of change-over contacts. | Simultaneous short-circuit can be excluded for switches in accordance with EN 60947-5-1 (IEC 60947-5-1) (see remark 1)). | |

NOTE: The fault lists for the mechanical aspects are considered in annex A.

Wiring Diagram

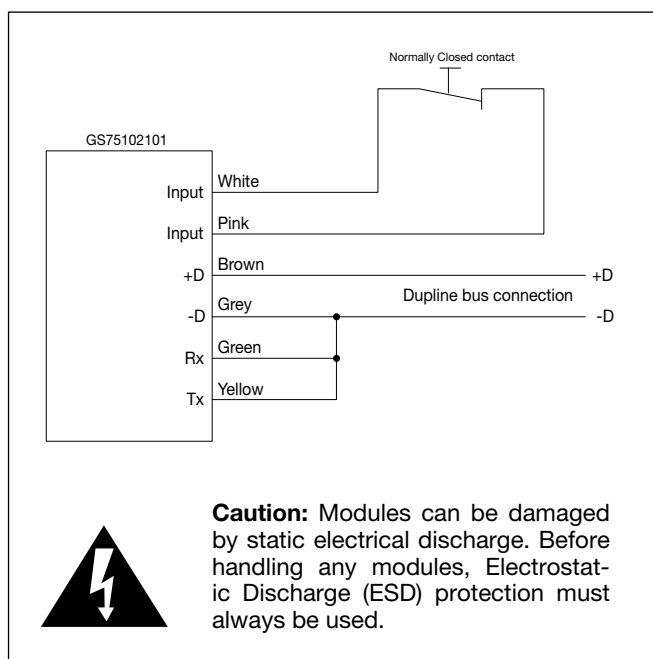

Wire Connections

| | |
|---------|-------|
| Brown: | +D |
| Grey: | -D |
| Green: | Rx |
| Yellow: | Tx |
| White: | Input |
| Pink: | Input |