

Two phase / single phase DIN Rail Mountable Switching Power Supply

Output Power 100 watts



Technical Data Installation and Operation

DEFINITION OF MODELS

SPD241002

24 : Output Voltage

12 12Vdc output

24 24Vdc output

48 48Vdc output

Fig. 1


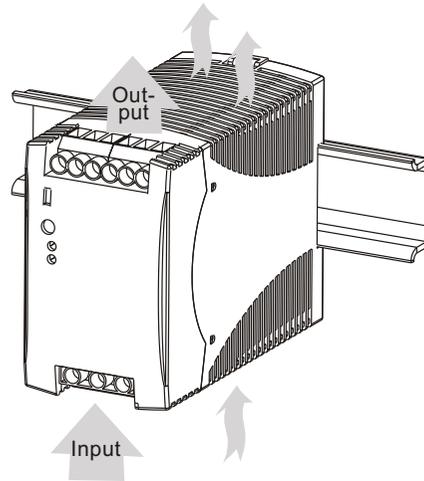


Fig. 3

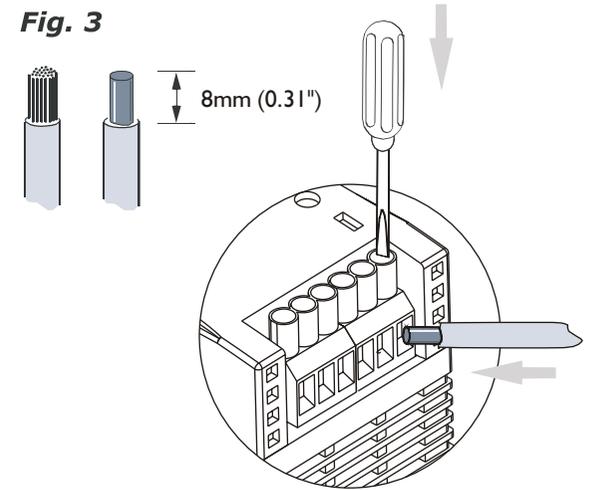

Connector size range

* AWG24 - 10

- Input connector can withstand torque at maximum
1.01Nm (9lb-in)

- Output connector can withstand torque at maximum
0.621Nm (5.5lb-in)

Use copper conductors only, 60/75 °C (140/167 °F)

Max. surrounding air temperature 50 °C (122 °F) for UL508

Fig. 2

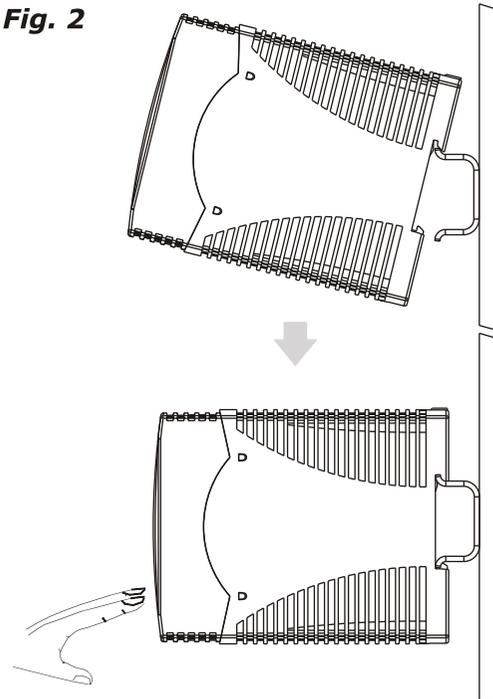


Fig. 4

